




EGILSSTADIR AIRPORT — INTERNATIONAL GATEWAY

Egilsstaðir International Airport has one runway, 2000 m for takeoff and 1850 m for landing. It is 45 m wide and can safely serve commercial jets. The airport is up to high standards with Aerodrome Flight Information Service (AFIS).

The fire and rescue service at the airport is in accordance with ICAO category 5 and can be raised to category 7 on request. Egilsstaðir International Airport is located in the east of Iceland which requires excellent winter services. The airport is very well equipped for snow removal and is open all year round.

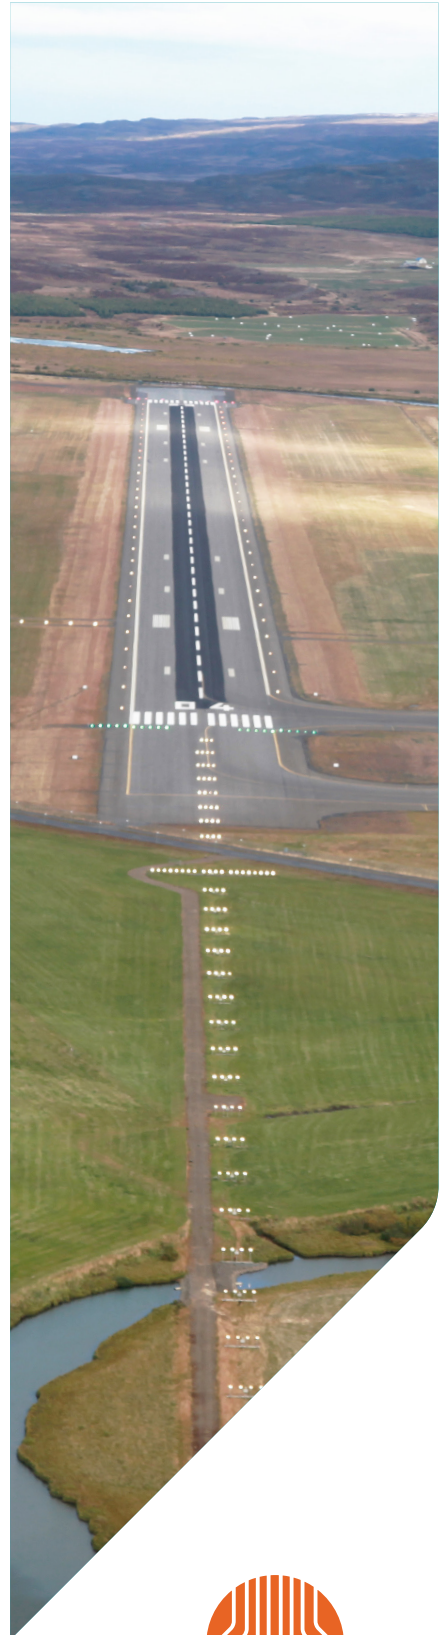

ISAVIA

TECHNICAL INFORMATION

ARP coordinates and site at Aerodrome	65°17'00"N 014°24'05"W Center of Runway
Direction and distance from the CITY	005° GEO - 0.8 NM
Elevation/Reference temperature	75 FT / 11.3°C (July)
Geoid undulation at ADELEVPSN	212 FT
MAG VAR/ Annual change	11°W (2013)/ 16 min
AD Administration, address, telephone, telefax, AFS	Isavia ltd. Egilsstadir Airport Tel.: +354 424 4040 Email: biege@isavia.is BIEG AFIS: Tel.: +354 424 4020, Fax: +354 471 2607
Types of traffic permitted	IFR-VFR
Cargo handling facilities	Limited - PN
Fuel/oil types	AVGAS 100LL, JET-A1 /NIL
Fuelling facilities / capacity	800 L pr min JET-A1
De-icing facilities	O/R
Hangar space available for visiting aircraft	Nil
Repair facilities for visiting aircraft	Nil
Landing Aids	RWY 04: ILS/RNAV/NDB RWY 22: RNAV/NDB
AD category for fire fighting	CAT V CAT VII PN 10 min Information tel: +354 424 4020 e-mail: biegtwr@isavia.is
Runway length, width and strength	ASPH / 1850x45 / PCN 45 / F/A/X/T
Apron surface and strength	Asphalt 220x40 m - PCN 45 / F/A/X/T
Taxiway width, surface and strength	ASPH 30 m - PCN 45 / F/A/X/T
Landing charges	Information on landing charges can be found on www.egilsstadirairport.is
Passenger charges	Information on landing charges can be found on www.egilsstadirairport.is
Security charges	Information on landing charges can be found on www.egilsstadirairport.is
Operational hours	0700 - 2300 Service provided outside of operational hours upon request

RWY designator	APCH LGT type LEN INTST	THR LGT color WBAR	VASIS (MEHT) PAPI	TDZ LGT LEN	RWY Centre line LGT length, spacing color, INTST	RWY edge LGT LEN, spacing color INTST	RWY End LGT color WBAR	SWY LGT LEN (M) color	Remarks
1	2	3	4	5	6	7	8	9	10
04	900 m LIH Crossbar 300 m SEQ. FL. CL.	THR LIH green (FLG THR identification LGT)	PAPI 3°	NIL	NIL	LIH W (Y CZ 600m) edge	END LIH R	NIL	TWY-APRON LIL B
22	NIL	THR LIH green (FLG THR identification LGT)	PAPI 3°	NIL	NIL	LIH W (Y CZ 600m) edge	END LIH R	NIL	